




TB118
PITCH: 0.5625" ($\frac{9}{16}$ "), DOUBLE ROW
CURRENT RATING: 30 AMPS.
MATERIAL: THERMO PLASTIC, UL94-V0
2 POLE~24POLE

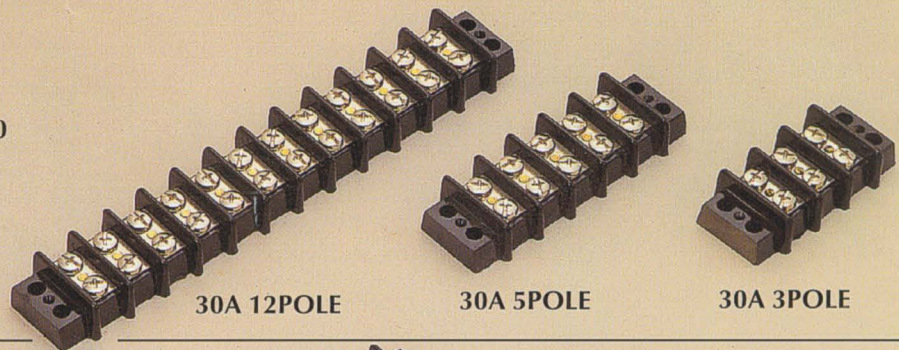


TB117
PITCH: 0.4375" ($\frac{7}{16}$ "), DOUBLE ROW
CURRENT RATING: 20 AMPS.
MATERIAL: THERMO PLASTIC, UL94-V0
WIRE SIZE: 14 AWG MAX.
2 POLE~30POLE

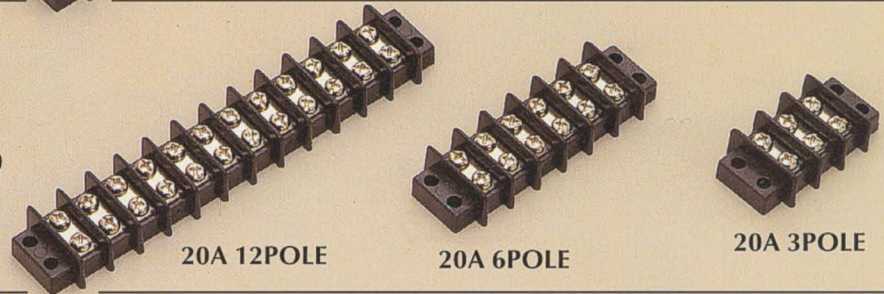


TB116
PITCH: 0.375" ($\frac{3}{8}$ "), DOUBLE ROW
CURRENT RATING: 15 AMPS.
MATERIAL: THERMO PLASTIC, UL94-V0
WIRE SIZE: 16 AWG MAX.
2 POLE~30POLE

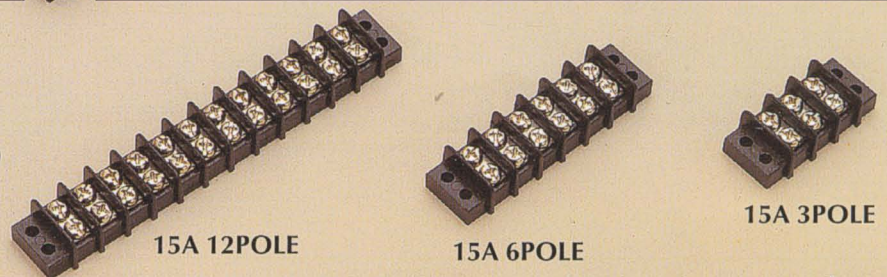

TB111
PITCH: 0.375" CENTERS
SINGLE ROW: 2 POLE~30POLE
MATERIAL: THERMO PLASTIC, UL94-V0

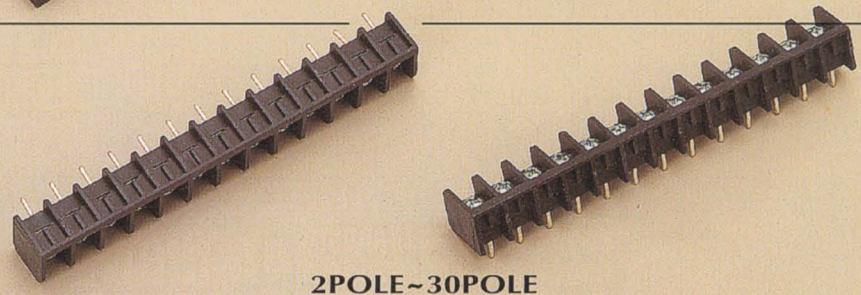

TB953
PITCH: 0.375" CENTERS
SINGLE ROW: 2 POLE~30POLE
MATERIAL: THERMO PLASTIC, UL94-V0

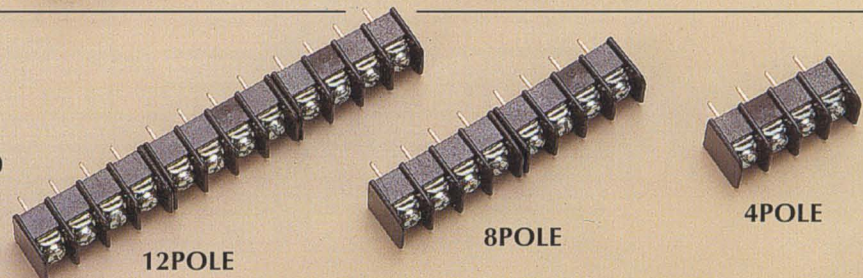

TB825
PITCH: 0.325" CENTERS
SINGLE ROW: 2 POLE~32POLE
MATERIAL: THERMO PLASTIC, UL94-V0

