



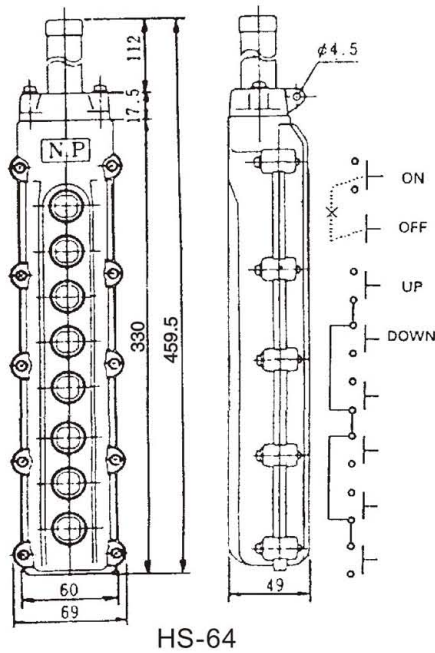

Number of buttons	Complete type	Rating	Cable bushing diameter(mm)
2(1pair)	HS-61	24VAC 5A	8~16Dia
4(2pair)	HS-62	120VAC 5A	
6(3pair)	HS-63	250VAC 5A	
8(4pair)	HS-64	500VAC 5A 24VDC 2A 120VDC 0.4A	

Compact high visibility orange enclosure NEMA 4x enclosure rating
Ultra-long service life , -15° C~70° C operation 100g shock resistance

DIMENSIONS

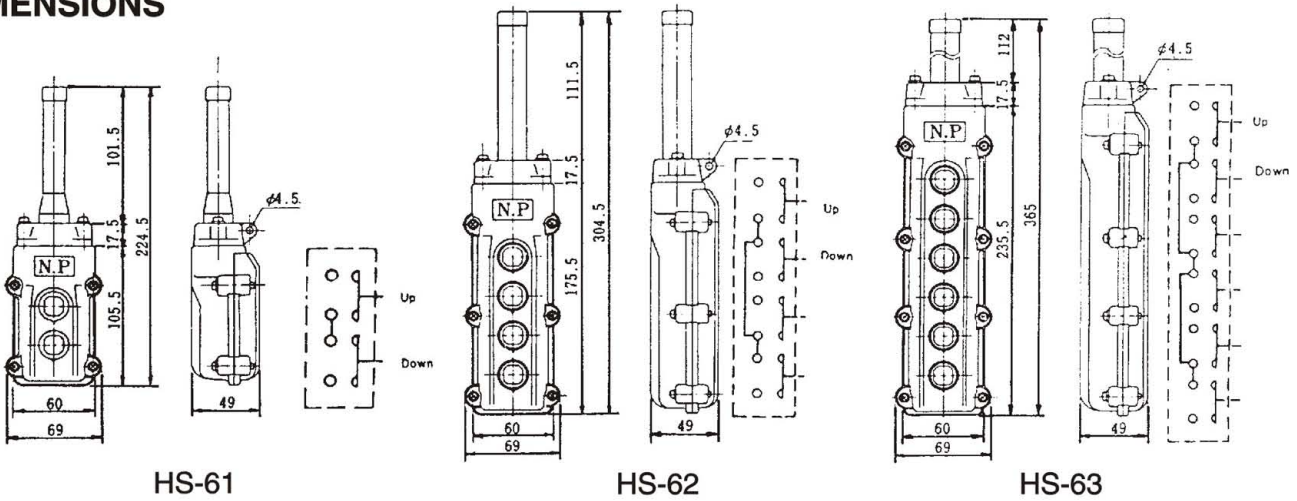

Note: All switch pairs are mechanically interlocked.
ON-OFF can be substituted in first two buttons
any switch shown

LEGENDS

UP	DOWN	FAST	SLOW	HING	LOW	NORTH	SOUTH
ON	OFF	RIGHT	LEFT	RAISE	LOWER	EAST	WEST
IN	OUT	FWD	REV	START	STOP	OPEN	CLOSE