


# HOIST WATER PROOF PUSH BUTTON PENDANT SWITCH



PART NO.	CABLE GLAND SIZE	STYLE	CABLE BUSHING SIZE	BUSHING COLLARS
34311	7.5mm DIA. ~ 10.5mm DIA.	C1	7.5mm DIA. ~ 13.5mm DIA.	CABLE O.D. 7.5 ~ 19.5 mm
34312	10.3mm DIA. ~ 13.5mm DIA.			
34313	13.3mm DIA. ~ 16.5mm DIA.	C2	13.3mm DIA. ~ 19.5mm DIA.	
34314	16.3mm DIA. ~ 19.5mm DIA.			
34315	19.3mm DIA. ~ 22.5mm DIA.	C3	19.3mm DIA. ~ 25.5mm DIA.	CABLE O.D. 19.3 ~ 28.5 mm
34316	22.3mm DIA. ~ 25.5mm DIA.			
34317	25.3mm DIA. ~ 28.5mm DIA.	C4	25.3mm DIA. ~ 28.5mm DIA.	
39825	13.3mm DIA. ~ 16.5mm DIA.	C23	13.3mm DIA. ~ 25.5mm DIA.	CABLE O.D. 13.3 ~ 25.5 mm
39826	16.3mm DIA. ~ 19.5mm DIA.			
303C18		C18	14 mm DIA. ~ 18.4 mm DIA.	

## Jumpers

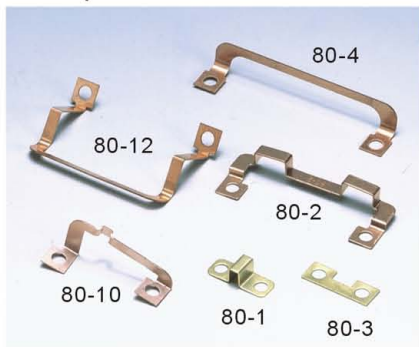

PART NO.	STYLE	
34759	80-1	Internal use on 34294 & 34295 to connect 1 and 5
34760	80-2	Used to connect common between 1-speed, 2-speed, 3-speed on-off switches
34761	80-3	Internal use on all 2-speed switches to connect terminals 6 to 4 and 14 to 16
35538	80-4	External use on 3-speed sw. to connect terminal 18 of two adjacent 3-speed sw. Also use to connect terminal 8 of two adjacent 3-speed sw.
	80-10	
34992	80-12	Internal use on 2-speed sw. to connect 5 to 15

## Blank plate Part No. 34304

Blind rubber gasket with metal plate




## Legend sheet

### Button legend



34326

## Selector sw legend sheet

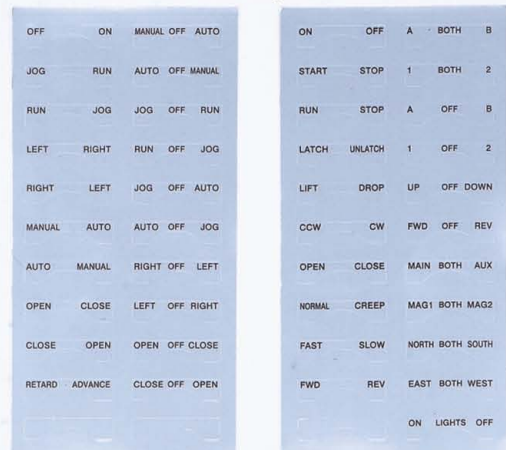

37228