


Micro Switches



AM-1308

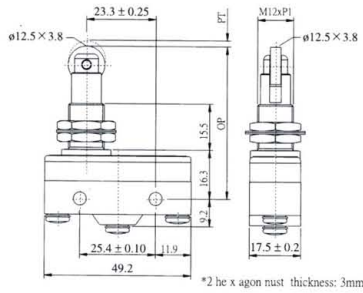


F MAX	250g-450g
RF MIN	114g
PT MAX	0.5mm
OT MIN	3.58mm
DT MAX	0.05mm
FP MAX	-
OP	49.7 ± 1.2

*2 he x agon must thickness: 3mm




AM-1514

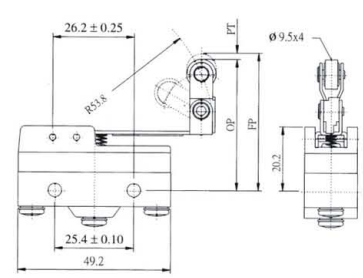

F MAX	150g
RF MIN	25g
PT MAX	6.4mm
OT MIN	4.0mm
DT MAX	1.6mm
FP MAX	47.2mm
OP	41.3 ± 0.8



AM-1309

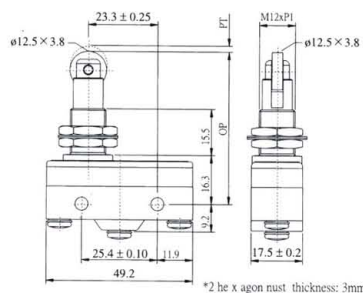


F MAX	250g-450g
RF MIN	114g
PT MAX	0.5mm
OT MIN	3.58mm
DT MAX	0.05mm
FP MAX	-
OP	49.7 ± 1.2

*2 he x agon must thickness: 3mm




AM-1515

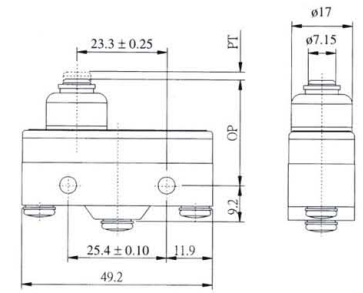

F MAX	540g
RF MIN	114g
PT MAX	2.3mm
OT MIN	1.6mm
DT MAX	0.06mm
FP MAX	-
OP	28.2 ± 0.5




AM-1315

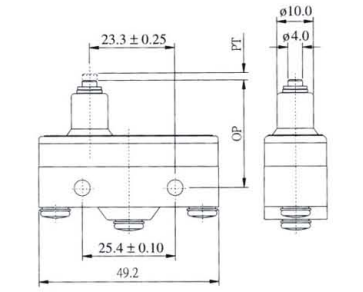

F MAX	540g
RF MIN	114g
PT MAX	1.9mm
OT MIN	1.6mm
DT MAX	0.06mm
FP MAX	-
OP	28.2 ± 0.5




AM-1543

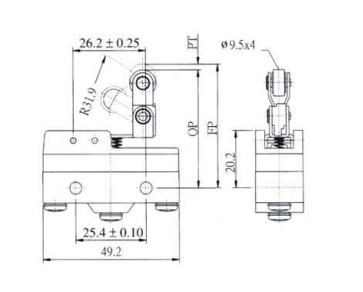

F MAX	250g-450g
RF MIN	114g
PT MAX	0.5mm
OT MIN	0.13mm
DT MAX	0.05mm
FP MAX	-
OP	15.9 ± 0.4




AM-1317

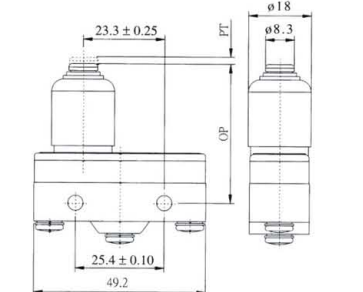

F MAX	540g
RF MIN	114g
PT MAX	2.4mm
OT MIN	3.5mm
DT MAX	0.06mm
FP MAX	-
OP	38.1 ± 1.2




AM-1544

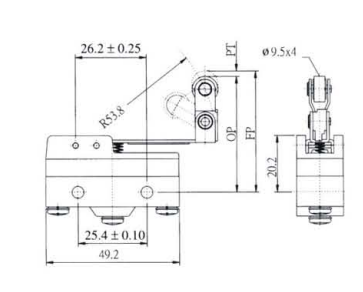

F MAX	170g
RF MIN	42g
PT MAX	2.7mm
OT MIN	2.4mm
DT MAX	0.51mm
FP MAX	43.6mm
OP	41.3 ± 0.8




AM-1513

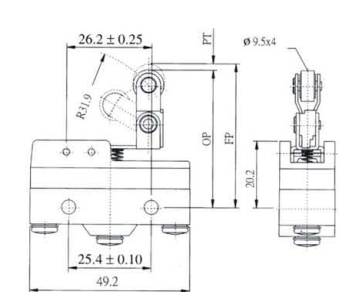

F MAX	180g
RF MIN	50g
PT MAX	2.7mm
OT MIN	2.4mm
DT MAX	0.8mm
FP MAX	43.6mm
OP	41.3 ± 1.8



AM-1578

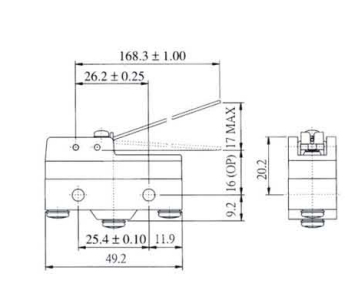

F MAX	110g
RF MIN	25g
PT MAX	6.4mm
OT MIN	4.0mm
DT MAX	1.6mm
FP MAX	47.2mm
OP	41.3 ± 0.8