



# Limit switches

**AZ-5101**

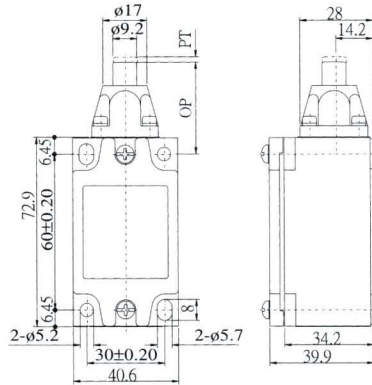


OF MAX	2800g-6 lbs.
RF MIN	900g-2 lbs. Max.
PT MAX	2mm-.070 in.
OT MIN	5.5mm-.200 in. Max.
DT MAX	1.0mm-.040 in.
OP	34 ±0.8

**AZ-5104**

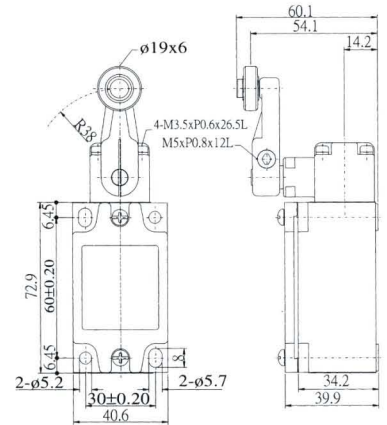


OF MAX	1400g-3 in.lbs.
RF MIN	227g-1/2 lb.
PT MAX	15° to 20°
OT MIN	Min. 25°
DT MAX	Max. 12°
TF:	Max. 2720g-4 in. lbs.
TT:	Min. 43

**AZ-5102**

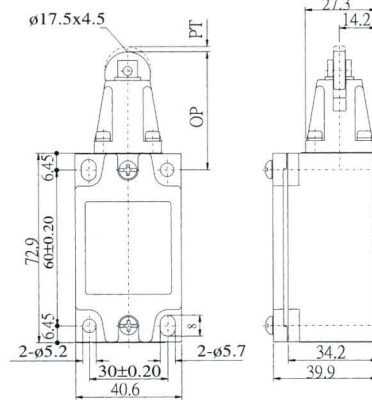


OF MAX	2800g-6 lbs.
RF MIN	900g-2 lbs. Max.
PT MAX	2mm-.070 in.
OT MIN	5.5mm-.200 in. Max.
DT MAX	1.0 mm-.040 in.
OP	44 ±0.8

**AZ-5106**

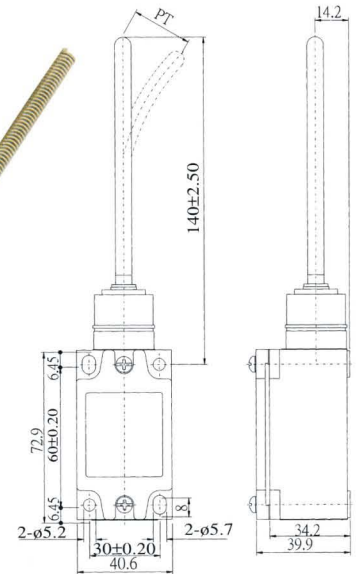


OF MAX	150g-5in. oz.
RF MIN	-
PT MAX	30°
OT MIN	-
DT MAX	-

**AZ-5109**

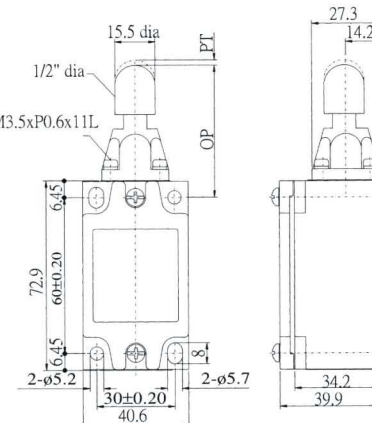

OF MAX	2800g-6 lbs.
RF MIN	900g-2 lbs. Max.
PT MAX	2mm-.070 in.
OT MIN	4mm-.157 in. Max.
DT MAX	1.0mm-.040 in.
OP	44.5 ±0.8

**AZ-5107**

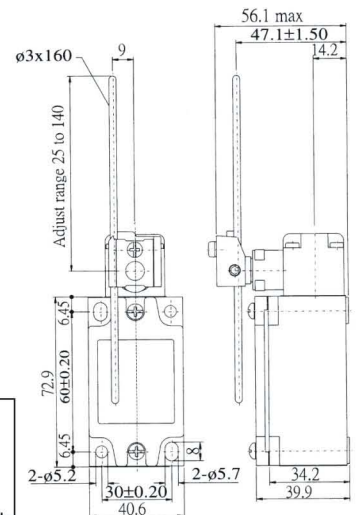

OF MAX	150g-.5 in. oz.
RF MIN	28g-1 in. oz.
PT MAX	15° to 20°
OT MIN	30°
DT MAX	12°
TF:	Max. 200g-1/2 in lb
TT:	Min. 43°